Titon®

Fixing and Operating Instructions

Overture Door Knocker Urn with Viewer Aperature

Diagram

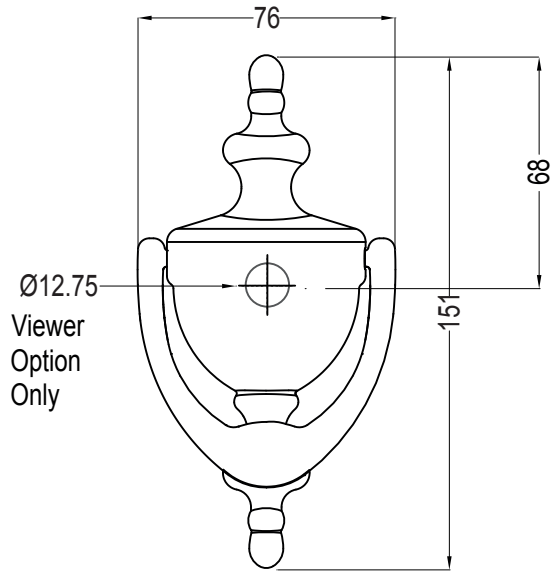

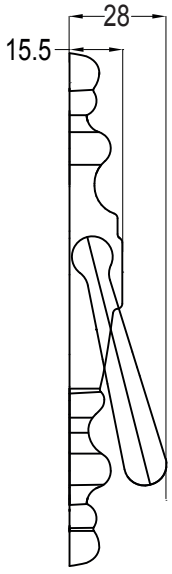

Supplied with:

Screws 3 of 4mm Ø
20mm Long
Countersunk

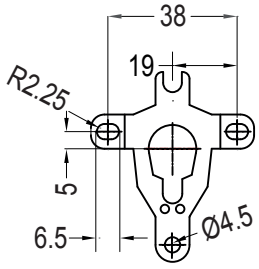

Fixing
Bracket

Fixing Instructions

The door knocker is fitted to a door using a discrete bracket. When positioning the bracket please refer to drawing to ensure correct overall position of knocker is achieved.

1. Pilot drill fixing holes in the door.
2. Drill 12.5mm hole for viewer (where applicable)
3. Screw bracket to the door.
4. Place the knocker over the bracket and push down until it clips into place.
5. Fit viewer if applicable (see separate instructions).

Cleaning

Door knocker should only be cleaned using warm soapy water and a soft cloth.
Do not clean any part with solvents or abrasive substances.

Failure to adhere to these instructions invalidates your Titon Product Guarantee.
Paint or corrosion not covered by Guarantee.